


**Submittal**

TAG:

Condensing Unit  
Up to 15.2 SEER2  
Model: AAC5048E1000A

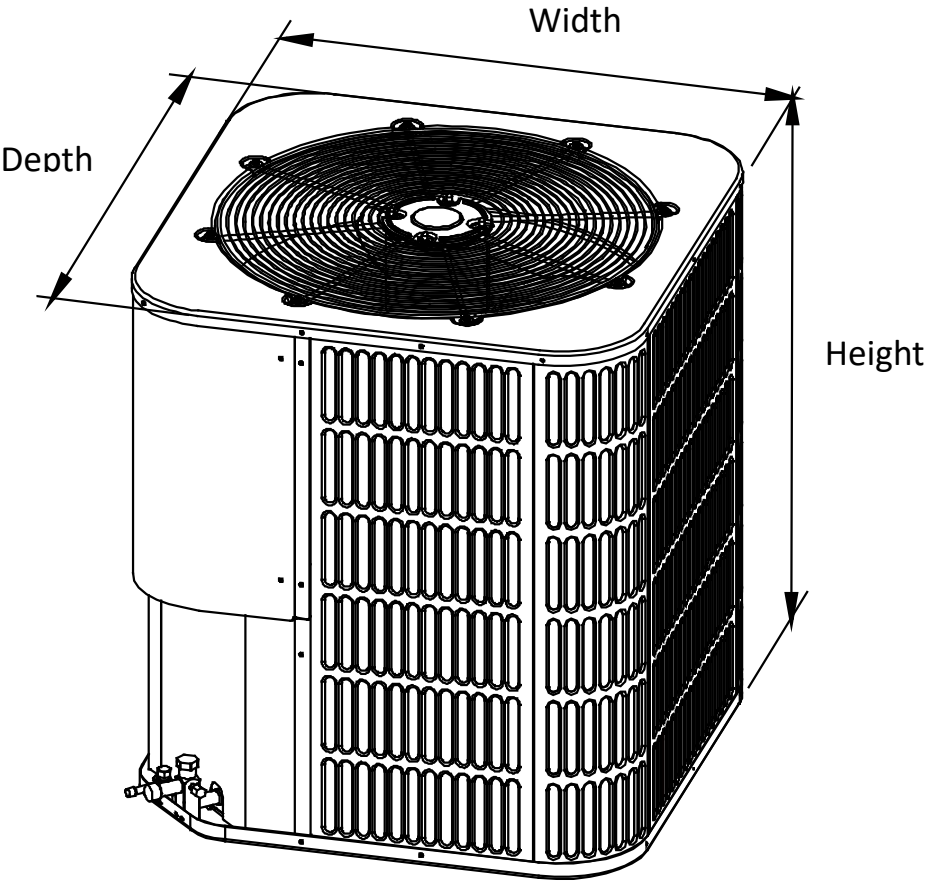

		AAC5048E1000A
UNIT DIMENSION AND WEIGHTS		
	Height (in.)	33-3/16
	Width (in.)	29-1/8
	Depth (in.)	29-1/8
	Weight (lbs.)	191

## Specifications

	AAC5048E1000A
<b>NOMINAL CAPACITY</b>	
Cooling (BTU/h)	48,000
Heating (BTU/h)	/
<b>ELECTRICAL DATA</b>	
Voltage / Phase (60 Hz)	208/230 / 1
Min. / Max. Voltage	187/253
MCA	25.2
MOP	45
<b>COMPRESSOR</b>	
Type	Scroll
Stage	Single
RLA	18.4
LRA	94
Crankcase Heater	NO
<b>CONDENSER COIL</b>	
Type	Tube & Fin
Tube Size(O.D)	3/16
<b>FAN MOTOR</b>	
Motor Type	ECM
Capacitor(uF)	/
Horsepower (HP)	1-1/3
Full Load Amps (FLA)	2.2
<b>REFRIGERATION SYSTEM</b>	
Liquid Valve Size (O.D.)	3/8
Suction Valve Size (O.D.)	7/8
Liquid Line Size ("O.D.)	3/8
Suction Line Size ("O.D.)	7/8
Refrigerant Charge (lbs. - oz.)	8 LBS.-10 OZ
Superheat(°F)	9°F
<b>OPERATION RANGE</b>	
Cooling(°F)	55-115
Heating(°F)	/
<b>SOUND POWER (DB)</b>	76

#### Standard Features:

- R410A chlorine-free refrigerant.
- Energy-efficient compressor.
- Internally protection against high temperature motor overload conditions.
- High quality condenser with inner-groove copper tube and aluminum fin.
- Service valves with sweat connections and easy-access gauge ports.
- Factory-installed high pressure switch
- AHRI certified and ETL listed
- Optional drier filter as accessory.

#### Cabinet Features:

- Unique sound control top design.
- Compact design, easy installation and transportation.
- Powder-painted galvanized steel cabinet.
- Wire fan discharge grille.
- Steel louver coil guard

Note: Product specifications change from time to time as product improvements and developments are released and may vary from those in this document. Tuttokool has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

